


COLOUR FILMS DCH 426 DICHROICS

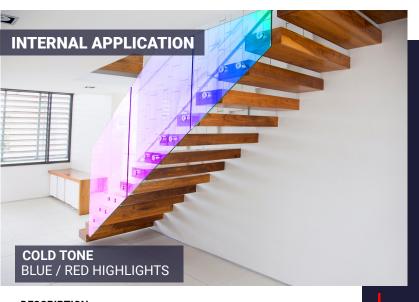

DESCRIPTION

This film allows light to pass through, capturing it to form reflections of different colours. The reflections vary from blue to red.

Depending on your viewing angle, these effects create incomparable shades of modern decoration.

Beware of the risk of thermal shock.



SUSTAINABILITY: 5 years for vertical applications in Central Europe.



USE: For all types of glazing.



MAINTENANCE: After 30 days with a standard cleaning solution (non-abrasive, ammonia-free, etc.). Do not use cleaning products that could scratch the surface.



STORAGE: 2 years from delivery. This film should be stored away from excessive humidity and sunlight, at a temperature below 38°C.

In order to meet the highest standards, we recommend that you do not mix films from different productions.

Application notes





Video of the installation





ADHESIVE : PROTECTOR : THICKNESS :

SUPPORT:

COLOUR:

APPLICATION SIDE : VISIBLE LIGHT TRANSMISSION :

T° OF APPLICATION:

STANDARDS : FIRE RATING :

GUARANTEE :

*For glazing not exposed to the sun

BY ROLL :



PET

Acrylate PSA 7 microns

Siliconised PET 23 microns

55 microns

Rainbow

Internal

48,90 %

min, + 5°C

EUROCLASSES

B-s1, d0

5 years interior*

1,38 x

10 m

METHOD OF APPLICATION

The surface to be bonded must be free from dust, grease or any other contaminant. Some materials, such as polycarbonate, can cause bubbling problems. A compatibility test is therefore recommended. Can be installed on plexiglass and polycarbonate.

PRODUCTION AND STANDARDS

In order to constantly improve our products, we may modify colours and manufacturing processes without prior notice. Before applying our films, we recommend that users ensure that they are suitable for the intended use and comply with current standards.

- NOITION -





Showroom: 36 rue Réaumur 75003 Paris

Head office: P.A. des petits carreaux

2 avenue des Orangers 94380 Bonneuil sur Marne - France

: +33 (0)1 43 99 00 22

: info@reflectiv.com: www.reflectiv.com